

## BC SERIES MODULAR FIBRE OPTIC INTERFACE SYSTEM



### **BC625 4 Channel Balanced Analogue Audio Transceiver**

The BC625 provides bi-directional transmission of multiple channels of analogue line-level audio over optical fibre. All inputs are buffered and converted using full 24 bit A/D conversion then multiplexed onto a single optical data stream.


The BC625 is particularly suited for multi-channel audio transport and applications which require the audio to be carried independently to video or embedded audio signals.

All Bluebell cards are designed to retain maximum integrity of the signal path offering excellent jitter free optical transport. The BC625 is available in multimode, singlemode, WDM and CWDM variants to suit any fibre application.

The BC625 occupies a single slot in the BC100-3RU 19" rack-mounting frame which can hold up to 15 single slot cards. Some BC Series processing cards have dual functionality allowing up to 30 channels of video to be transmitted or received from a single 3RU frame.

Signal and card monitoring is achieved through SNMP monitoring in the BM102 network card. For stand alone applications the BC625 can be housed in an individual rugged enclosure.

## Schematic Diagram for BC625

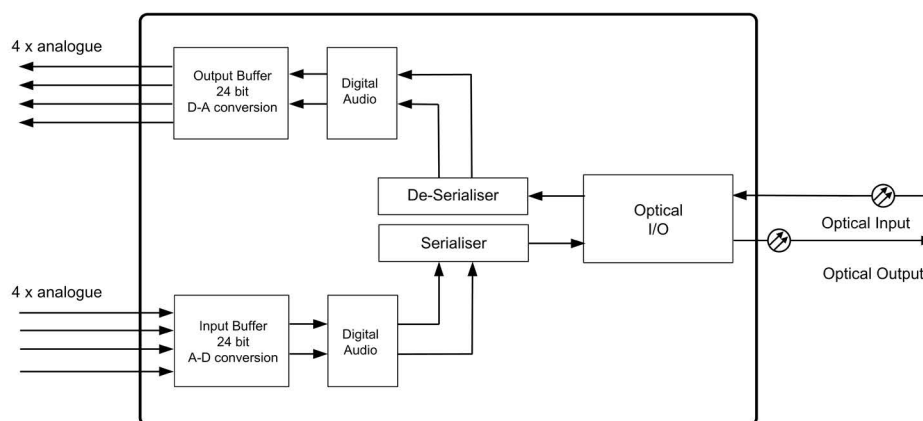

## Specifications

### Electrical Input Audio

Connector	26-way D connector
Impedance	24 kOhm differential input
Bandwidth	20 Hz to 20 kHz +/- 0.25 dB
System Gain	0 dB, nominal +/- 0.5dB
Format	Input level +24 dBu Maximum Ref 1 mW into 600 Ohm
Number	4 x Balanced Line Level Analogue Audio
Noise ref	< -90 dB p-p weighted full scale

### Electrical Output Audio

Impedance	44 Ohm differential output
Bandwidth	20 Hz to 20 kHz +/- 0.25 dB
System Gain	0 dB, nominal +/- 0.5dB
Format	Output level +18 dBu Maximum Ref 1 mW into 600 Ohm
Number	4 x Balanced Line Level Analogue Audio
Noise ref	< -90 dB p-p weighted full scale
Out Imp	<50 Ohm

### Optical Output

Connector	1 x female LC per direction
Wavelength	850nm, 1310nm, 1550nm, CWDM See Ordering Information
Optical Power	-2dBm @ 1310nm (typical) -2dBm @ 1510nm (typical) 0 dBm @ CWDM (typical)

### General card specifications

Depth	60mm
Width	20mm 4HP
Height	129mm 3RU
Weight	100g
Operating Temp	-30 to +70°C
Power	2.4W
No. of slots	1

### Conformance

EMI/RFI	Complies with 89/336/EEC, EN55022B, EN61000-4-2, EN61000-4-4-(Level 2), EN61000-4-4FTB EN61000-4-5, EN61000-4-11
Electrical	Complies with EN61000-6-1, EN 61000-6-2, EN61000-6-3, EN61000-6-4
Laser safety	Dependent on SFP fitted Complies with Class 1 laser product
RoHS	Complies with Directive 2002/95/EC
Warranty	5 years

## Ordering Information

BC625/M	Multimode Optical Transceiver Card for 4 x bidirectional Analogue Audio Signals.
BC625/S/13/WB	Singlemode Optical Transceiver Card for 4 x bidirectional Analogue Audio Signals (1310nm).
BC625/S/15/WB	Singlemode Optical Transceiver Card for 4 x bidirectional Analogue Audio Signals (1550nm).
BC625/S/CWDM/xx/WB	Singlemode Optical Transceiver Card for 4 x bidirectional Analogue Audio Signals

**Fitted with LC connectors as standard**

**Factory Default SMPTE Compatible Audio Settings.**

**For EBU Compatible Audio Settings please state at time of order.**

**For all available enclosures and frames see section "Universal Chassis and Power Supplies".**

# Bluebell

Bluebell Opticom Limited  
Unit 2 The Quadrant  
Howarth Rd  
Maidenhead  
Berkshire  
SL6 1AP  
UK

Tel: +44 (0) 1628 510055, Fax: +44 (0) 1628 510057  
Email: sales@bluebell.tv Website: www.bluebell.tv