


BC SERIES MODULAR FIBRE OPTIC INTERFACE SYSTEM



BC630T 4 Channel AES Audio Multiplexer

The BC630T is a transmitter for the transport of digital audio over fibre optic cable with the ability to carry 4 channels of AES/EBU audio. The incoming signal is auto-sensed and then equalised prior to multiplexing, conversion and transmission down a single optical fibre. All Bluebell cards are designed to retain maximum integrity of the signal path offering excellent jitter free optical transport. The BC630T card can be used with a BC620R unit allowing AES inputs to feed line level analogue outputs. The BC630T is available in multimode, singlemode, WDM and CWDM variants to suit any fibre application. The BC630T occupies a single slot in the BC100-3RU 19" rack-mounting frame which can hold up to 15 single slot cards. Some BC Series processing cards have dual functionality allowing up to 30 channels of video to be transmitted or received from a single 3RU frame. Signal and card monitoring is achieved through SNMP monitoring in the BM102 network card. For stand alone applications the BC630T can be housed in an individual rugged enclosure.

Schematic Diagram for BC630T

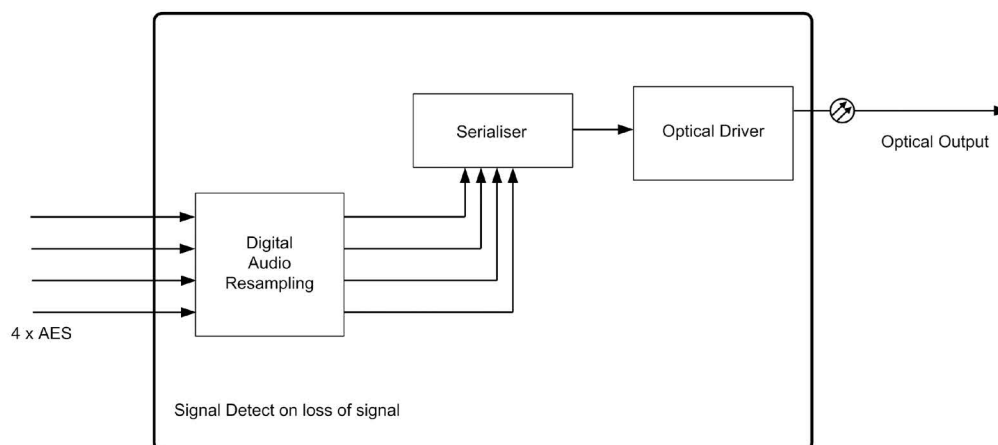

Specifications

Electrical Input Audio

Connector	26-way D connector
Impedance	110 Ohm
Format	AES 32 kHz to 192 kHz AES3-1992 (All 4 inputs resampled to 48 kHz)
Number	4 x AES/EBU Digital Audio

Optical Output

Connector ¹	1 x female LC plus secondary optical output
Wavelength	850nm, 1310nm, 1550nm, CWDM See Ordering Information
Optical Power	-2dBm @ 1310nm (typical) -2dBm @ 1510nm (typical) 0 dBm @ CWDM (typical)

General card specifications

Depth	60mm
Width	20mm 4HP
Height	129mm 3RU
Weight	100g
Operating Temp	-30 to +70°C
Power	2.4W
No. of slots	1

Conformance

EMI/RFI	Complies with 89/336/EEC, EN55022B, EN61000-4-2, EN61000-4-4-(Level 2), EN61000-4-4FTB EN61000-4-5, EN61000-4-11
Electrical	Complies with EN61000-6-1, E 61000-6-2, EN61000-6-3, EN61000-6-4
Laser safety	Dependent on SFP fitted Complies with Class 1 laser product
RoHS	Complies with Directive 2002/95/EC
Warranty	5 years

Ordering Information

BC630T/M	Multimode Optical Transmitter Card for 4 x AES Audio Signals.
BC630T/S/13	Singlemode Optical Transmitter Card for 4 x AES Audio Signals (1310nm).
BC630T/S/15	Singlemode Optical Transmitter Card for 4 x AES Audio Signals (1550nm).
BC630T/S/CWDM	Singlemode Optical Transmitter Card for 4 x AES Audio Signals (Dedicated CWDM Tuned Laser) (Wavelength to suit ITU Grid Spacing - see CWDM Ordering Matrix).

¹Fitted with LC connectors as standard

For all available enclosures and frames see section "Universal Chassis and Power Supplies".

Bluebell

Bluebell Opticom Limited
Unit 2 The Quadrant
Howarth Rd
Maidenhead
Berks
SL6 1AP
UK
Tel: +44 (0) 1628 510055, Fax: +44 (0) 1628 510057
Email: sales@bluebell.tv Website: www.bluebell.tv

