


## Hothead Silhouette 4K Camera System



### Description:

- Fully integrated 4K UHD robotic head system compatible with SD-SDI, HD-SDI, 3G-SDI, and 4K UHD cameras.
- Base Unit supplies system power to Remote Units (Silhouette), which in turn provide DC power to the camera head; bi-directional control data flows between them.
- Four 3G-SDI video channels are sent from each Remote Unit to the Base Unit and into a BC160-1RU frame.
- Supports up to four 4K UHD heads per system.
- Fibre connectivity uses standard SMPTE hybrid cable with Neutrik OpticalCON Dual or LEMO 3K93C terminations.
- Provides power, control, and fibre optic RCP connectivity in a self-contained, expandable setup with no stage power required.

### Diagram:

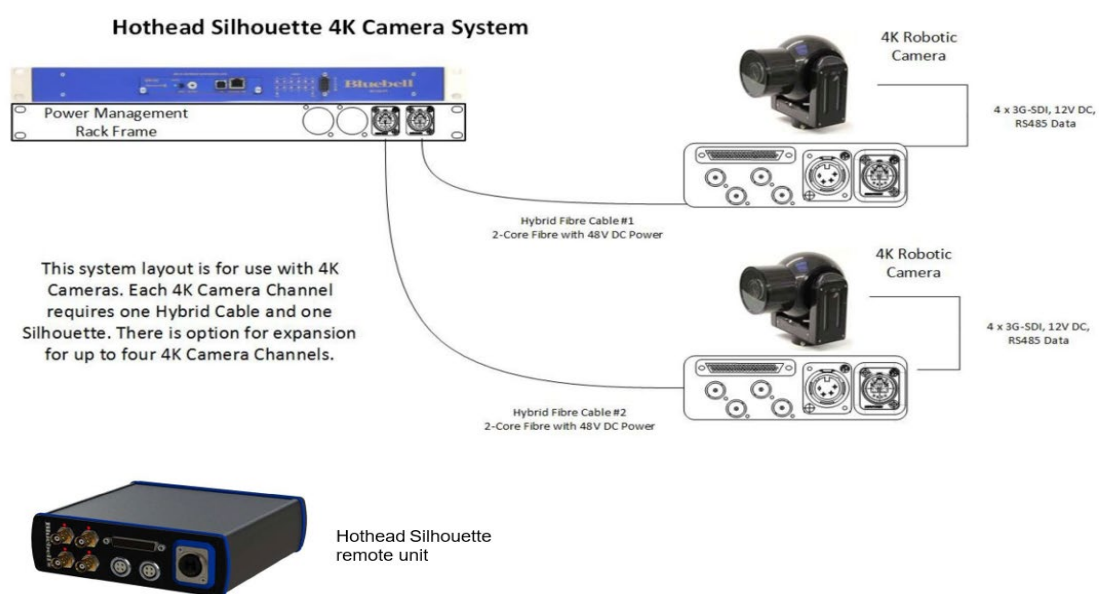

## Features

Video Transport	4 x SD-SDI, HD-SDI, 3G-SDI or 4K UHD
Data Transport	2 x RS232, 2 x RS422/485, 2 x BiDi GPI/O
Audio Transport	2 Channels Talkback (RTS/Clearcom Compliant) – Optional
System Power	48V DC 65W Per Channel (Up to 4 Channels Optional)
Camera Power	12-16V DC 60W Per Channel (2 Channels per Remote End)



**Bluebell Opticom Limited,  
Unit 2 The Quadrant,  
Howarth Rd,  
Maidenhead,  
Berks,  
SL6 1AP, UK  
Tel: +44 (0) 1628 510055,  
Email: [sales@bluebell.tv](mailto:sales@bluebell.tv)  
Website: [www.bluebell.tv](http://www.bluebell.tv)**

